


Topakustik Classic


HR 9/2 M

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions


formerly: TOPAKUSTIK HR 9/2 M

Topakustik also produces panels and planks with special grooves. These include the HR 9/2 M with semi-circular bars or a wider groove spacing with an axial dimension of 64 mm or 96 mm. Absorption values are available. Let us know more about your wishes.

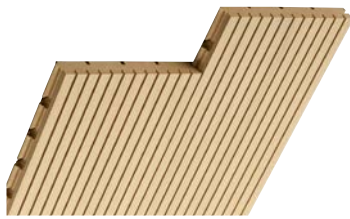

Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten. Installation with Turning-clip is only possible with thickness of 19 mm.



Normally flammable D-s2,d0 / CH RF 3



Painted
16 mm

Flame retardant B-s1,d0 / CH RF 2



Painted
16 mm

Standard
3800 × 128

Custom lengths are also available

HR 9/2 M-6%	α.w	Euro	NRC
216 mm	0.75 L	C	0.82
56 mm	0.75 M	C	0.85
60/4 M-3.5%	α.w	Euro	NRC
216 mm	0.45 L	D	0.53
56 mm	0.40 LM	D	0.55
61/3 M-3%	α.w	Euro	NRC
226 mm	0.50 L	D	0.49
66 mm	0.45 L	D	0.51
93/3 M-2%	α.w	Euro	NRC
226 mm	0.35 L	D	0.38
66 mm	0.35 L	D	0.39



* During planning, the axial dimension of 10.66 mm must be taken into account.